


# Flap Barrier

## FB-TL-119-L/R



FB-TL-119-L

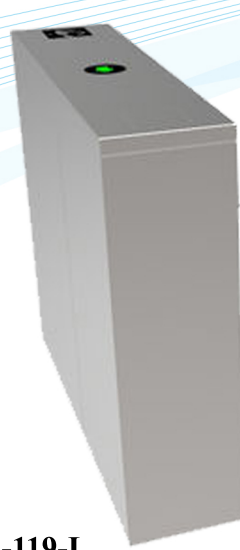

FB-TL-119-R

## Specification

Passage width (Max) : ≤500mm  
Throughput rate : 35 P/M  
Power Supply : 100V ~ 240V AC  
Operational Voltage : 24V DC  
Max Power Consumption : 30W  
Frequency : 50Hz ~ 60Hz  
Protection Level (IP) : ≥ 44  
Working Temperature : -25° ~ +70°  
Electro-magnetic Drive : DC  
Dimension excluding bars : 800 X 280 X 960 mm  
Weight : FB-TL-119-L/R : 40kg

## Feature :

- Use IC cards, ID cards, bar code or magnetic cards as automatic identification system.
- Display has been in use for statistics and numbers
- With voice and strobe light alerts
- A combination of infrared sensors and police anti-illegal entry into pedestrian access.
- Double anti-clipping function, photocell anti-clipping and mechanical anti-clipping
- The barrier can be set to delay closing in 1 ~ 60s after a valid card reading
- Single passage in the set direction
- Bi-directional single passage
- Plastic toughened glass
- Always free or locke