


Advanced Multidoor Access Control System - 4 Door

C3-400

Specification

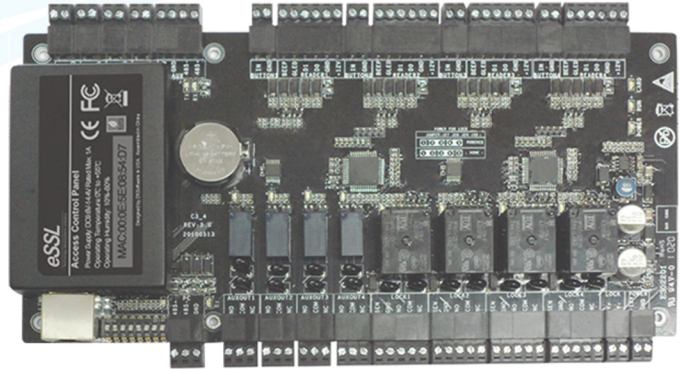

User Capacity: 30,000
Event Buffer: 1,00,000
CPU: 32bit MIPS CPU
RAM: 32MB
Flash Memory: 128 MB
Power/Current: DC 9.6V-14.4V, Rated Max. 1A
Communication: RS485, TCP/IP
Operating Temperature: 0°C - 55°C
Operating Humidity: 10% to 80%
Relative Humidity Non-Condensing
Dimension (mm): 218(W) x 106(H) (Single board)
345(W) x 275(H) x 70(D)
(With power supply and metal box)
Support : Proximity /Mifare / HID Readers
Numbers of readers supported : 12 (8 RS-485
Reader,4 26-bit wiegand reader)
Types of readers supported : 26-bit Wiegand and
RS485 FR Series Reader
Number of Inputs : 12(4 Exit Device,
4 Door Status, 4 AUX)
Number of Outputs :8 (4-Form C Relay or Lock
and 4-Form C Relay for Aux Output)

Features:

- ▶ 256 time Zones, 256 access levels
- ▶ Anti-passback function
- ▶ Interlock function , Linkage function
- ▶ Multi-Card Opening function, Remote door opening and closing
- ▶ Real-Time monitoring Via Web browser
- ▶ 4 auxiliary input may be connected to infrared body detectors,
- ▶ fire alarms, smoke detectors etc.
- ▶ 4 auxiliary output may be connected to alarms, cameras,door bells etc.

Software and Database Supported :

Access Security System 3.5 (Desktop Version)
Database Type:- MS Access / MS SQL