


Hydraulic Bollards

HB-273

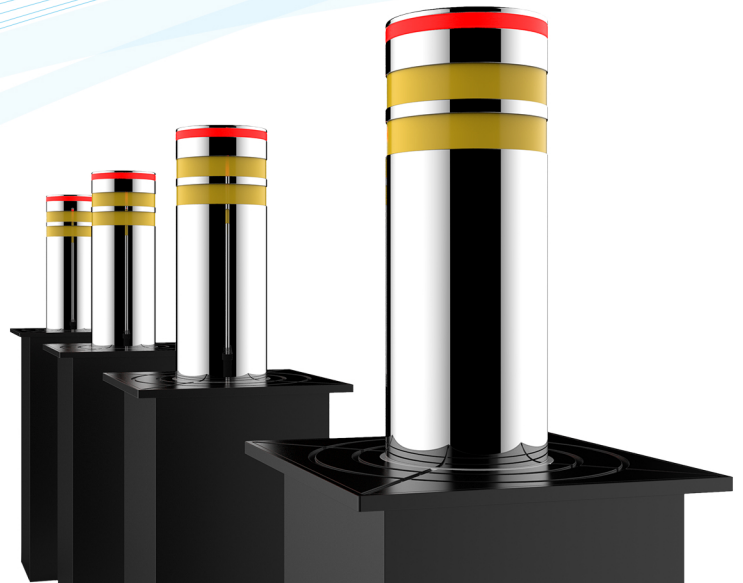

Specification

Bollard height: 900mm

Lift height: 600 mm (Customized : 400 ~ 900mm)

Bollard diameter: 273 mm

Thickness: 6 mm

Protection grade: IP68

System dynamic power (w) : 3.75 KW / 380 V

Rising time: 1 ~ 6 s (adjustable)

Dropping time: 1 ~ 6 s (adjustable)

Working temperature: 25° ~ 70°

Storage environment: - 30° ~ 75°

Control mode (optional) : remote control, manual, reading card,
access control and Loop Detector etc.,

Weight: +150 - 200 kg

System control

Hydraulic and electric control

Pressure bearing

80 tons container truck.

Anti-collision levels

K8

Material

Stainless steel 304, 316 stainless steel (optional)